

Features: Allows easy field assembly of stem extensions.


Weighs a fraction of steel extensions.

Upper locating ring can be easily modified to fit 4.5", 6" & 8" valve can risers.

Tested at 750 ft.-lbs torque.

Recommended for extensions up to 10 feet long.

Material: Upper and lower operating nuts are fiberglass reinforced nylon. Tubing is fiberglass reinforced thermoset polyester resin.

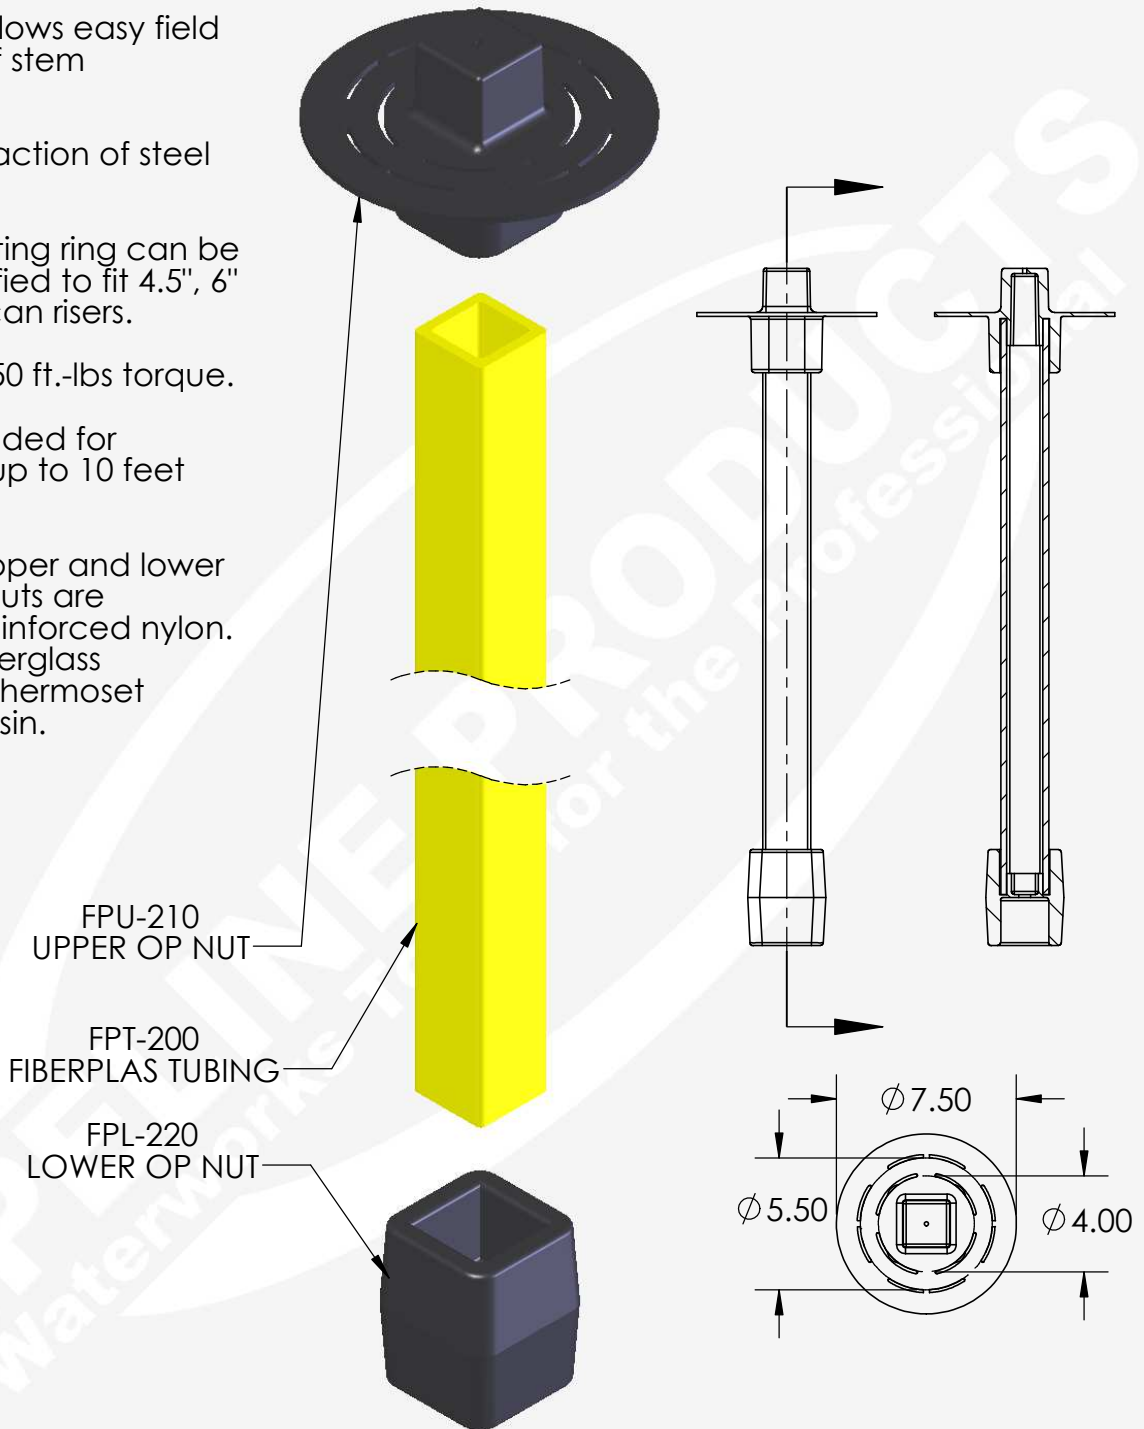

DIMENSIONS ARE IN INCHES | DO NOT SCALE DRAWING | DRW: OSBORNE | REV. B